



# S18 UC

UNDERCOUNTER VERSION



Expect more with this high-capacity solution that delivers **premium chilled, sparkling, and ambient water on demand.**

This advanced system produces up to 180 liters per hour\* of premium chilled, sparkling, and ambient water, perfect for high volume applications including hotels and restaurants.

Featuring an 11" dispense height, rapid cold carbonation, and manual faucets for dependable dispensing, the S18 UC makes quick, efficient bottle-filling an easy task for any user.

## System Highlights:

- 3-tap chrome dispensing tower features chilled, sparkling, and ambient water
- 4-Stage advanced filtration system can be easily mounted to chiller or installed remotely
- Carbonating chiller and purification system installs remotely or under counter
- Insulated trunkline and water recirculation to ensure optimal temperature from chiller to tap



The S18 UC sets itself apart as a **high-end, space-saving system** delivering generous capacity and exceptional **still and sparkling water**.

**Features:**


- Unrivaled 22lb ice bank chills a higher volume of cold water
- Utilizes R290 environmentally friendly natural refrigerant
- Equipped with a 1.7 liter sparkling tank
- Programmable flow meter tracks usage and allows more consistent scheduled service and filter changes
- Heavy duty rotary faucets allow for pressure and flow control to limit splashing
- Easily connects to external CO2\*\*
- Removable drip tray\*\*\*

\*\*CO<sub>2</sub> regulator included  
 \*\*\*Optional recessed drip tray

**3-Tap Chrome Tower**



**Undercounter Chiller**

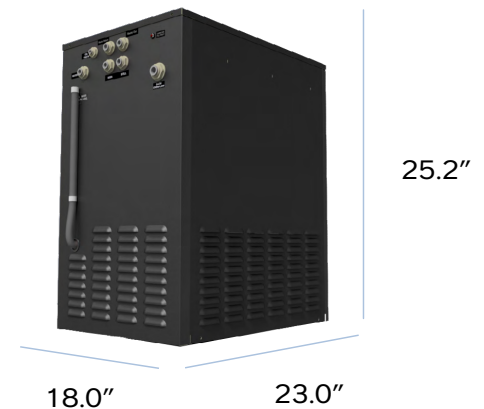

Tap Dimensions	25.5"h x 5.2"w x 22.3"d
Drip tray dimensions	1.3"h x 15.0"w x 5.0"d
Undercounter dimensions	25.2"h x 18.0"w x 23"d – Width includes 4.3" for filtration housing
Ventilation clearance requirement	See detailed installation guide for more information
Dispense height	11.0"h
Tap dry weight	20 lbs
Undercounter dry weight	94 lbs
Tower tap hole size requirement	2.0"
Chilling capacity	180 liters per hour*
Cooling technology	Ice bath chilling technology
Recommended water pressure	50 psi
Ice block weight	22 lbs
CO2 specificatio	Available external CO2 tank or bulk CO2 supply connection; Operates at 55 PSI
Rated voltage/frequency / running amps	115 V / 60 Hz / 7 amps
Model number	S18 UC

\*Capacity dependent on source water temperature



3175 Bass Pro Drive  
 Grapevine, TX 76051  
 (800) 288-1891



# S18

COUNTERTOP


Expect more with this high-capacity solution that delivers **premium chilled, sparkling, and ambient water on demand.**

This advanced system produces up to 180 liters per hour\* of chilled, ambient or sparkling water, perfect for high volume applications including hotels and restaurants.

Featuring an 11" dispense height, rapid cold carbonation, and manual faucets for dependable dispensing, the S18 makes quick, efficient bottle-filling an easy task for any user.

### System Highlights:

- 3-tap dispensing features cold, sparkling, and ambient water
- 4-Stage advanced filtration system easily mounts inside the unit for easy installation and service
- Ice bath cooling technology for a high-volume of cold water
- Large capacity drip tray engraved with water type to facilitate accurate bottle positioning

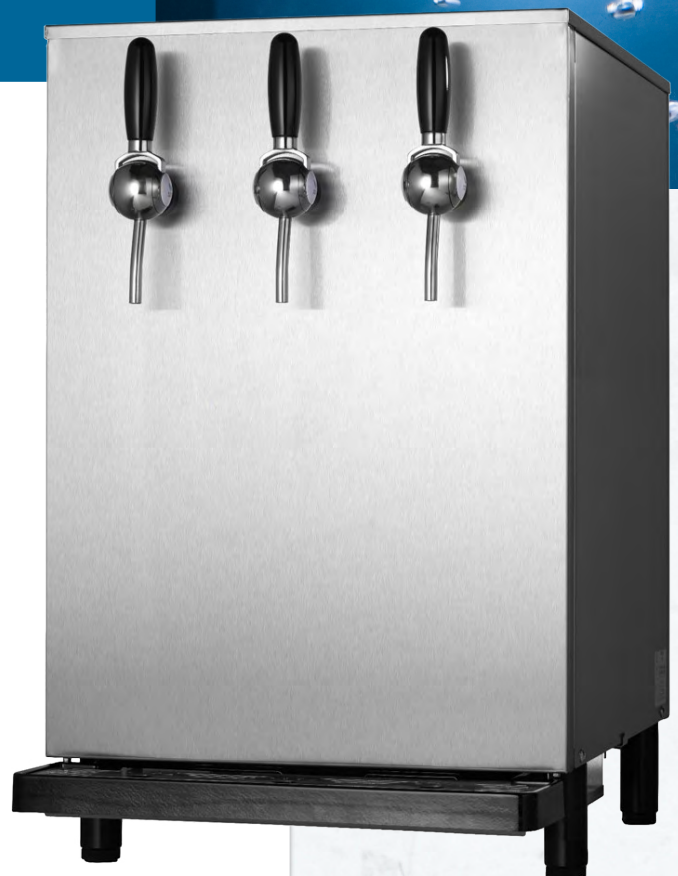

\*Capacity dependent on source water temperature

The S18 distinguishes itself as a **high-end system**, offering generous capacity and exceptional quality for both **still and sparkling water**.

**Features:**

- Unrivaled 22lb ice bank chills a higher volume of cold water
- Dispense height of 11” accommodates large reusable bottles
- Utilizes R290 environmentally friendly natural refrigerant
- Equipped with a 1.7 liter sparkling tank
- Programmable flow meter tracks usage and allows more consistent scheduled service and filter changes
- Heavy duty rotary faucets allow for pressure and flow control to limit splashing
- Easily connects to external CO<sub>2</sub>\*

\*CO<sub>2</sub> regulator is included



Height	27.4 in
Width	22.4 in
Depth	17.1 in
Depth with Drip Tray	23.6 in
Rear Ventilation Clearance**	2 in
Dry Weight	110 lbs
Ice Bank	22 lbs
Chilling Capacity	180 L/hr*
Maximum Flow Capacity	240 L/hr
Power Voltage   Frequency   Running Amps	115V   60 Hz   7 Amps
CO <sub>2</sub> Specification	Available hookup for external CO <sub>2</sub> tank or bulk CO <sub>2</sub> supply. Connected with ¼” poly tubing to the regulator. Operates at 55 psi.
Water Supply / Pressure PSI (Bar)	3/8” Øly Tubing for water connection 40 psi min – 60 psi max (2.75 – 6.9 bar)

\*Capacity dependent on source water temperature  
\*\*Allow clearance on top and left side of dispenser for maintenance



3175 Bass Pro Drive  
Grapevine, TX 76051  
(800) 288-1891