


# lago®



2 TAP  
SYSTEM

CLCTPOU2TS

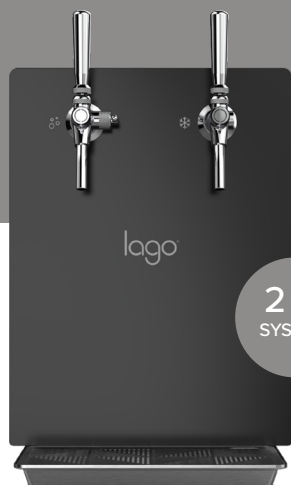

3 TAP  
SYSTEM

CLCTPOU3TS



## COUNTERTOP 2 & 3 TAP SPARKLING SYSTEMS


The Lago Countertop 2 & 3 Tap Sparkling Systems have an elegant modern design to suit any setting and provide sparkling, cold, and ambient water. This versatile system is ideal for hotels, restaurants, and breakrooms.

### 2-TAP SYSTEM KEY FEATURES:

- Dispenses sparkling and cold water
- Glass front, stainless steel body
- Carbonation level control
- 2 Stainless steel taps + drip tray
- Leak protection

### 3-TAP SYSTEM KEY FEATURES:

- Dispenses sparkling, cold, and ambient water
- Glass front, stainless steel body
- Carbonation level control
- 3 Stainless steel taps + drip tray
- Leak protection



### Control Carbonation Level

Easily change the level of carbonation to achieve the perfect amount of bubbles.



### ICE BANK COOLING TECHNOLOGY

Quickly and efficiently chills water for delicious cold refreshment on demand.





**Restaurants  
& Lounge Bars**



**Hospitality  
& Spas**



**Company  
Breakrooms**



**Corporate  
Offices**




## Premium Quality

Mirror-finished black stainless steel pairs beautifully with corrosion-resistant nickel faucets for an elegant look.



## Leak Protection

Efficient WaterBlock technology reliably protects system against water leaks.

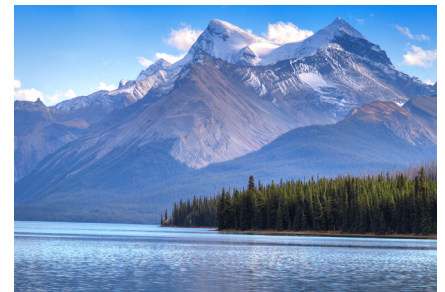

## Environmentally Friendly

Reduces waste by eliminating single-use plastic water bottle waste.

### 2-TAP SPECIFICATIONS:

Item No.	CLCTPOU2TS
Flow Rate*	0.66 GPM
Dimensions (W x D x H)	12.6" x 24.7" x 20"
Max. Chill Capacity	9.25 gallons per hour
Inlet Pressure PSI (Bar)	40-100 PSI (2.75-6.9 Bar)
Weight	55 lb

### 3-TAP SPECIFICATIONS:

Item No.	CLCTPOU3TS
Flow Rate*	0.66 GPM
Dimensions (W x D x H)	17.7" x 26.4" x 20"
Max. Chill Capacity	21.1 gallons per hour
Inlet Pressure PSI (Bar)	40-100 PSI (2.75-6.9 Bar)
Weight	75 lb

*\*Flow rate and capacity are dependent upon inlet water quality, TDS level, water temperature, and quality of water pre-treatment.*